


The portable blower-cleaners shown on this page are offered in 1-1/2 h.p., 1-4/10 h.p. and 2/3 h.p. models to make a full range of capacities to suit a wide variety of industrial needs. The first three models can be quickly converted from blowers to vacuum cleaners with the 1-1/2" diameter suction attachments shown at the bottom of this page.

Also included is a "Hot & Cold" blower which delivers 160° F. electrically heated air, or ambient temperature air, at the flip of a switch. The "Hot & Cold" model cannot be used as a vacuum cleaner.

All these blowers are engineered for year-in and year-out dependability. All are equipped with sealed precision ball bearings; no oiling required.

Model H Dual-Speed Blower

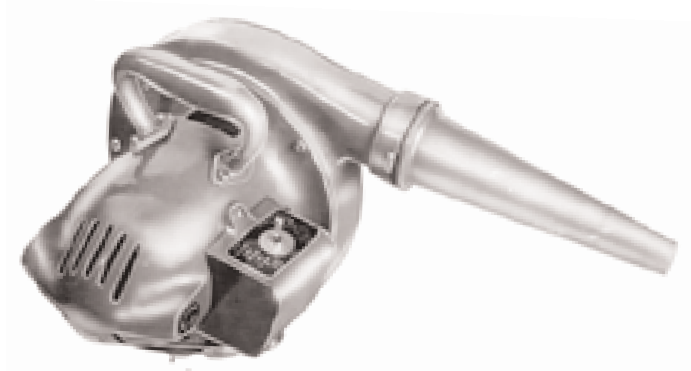

Model H is 1-1/2 h.p.; air speed 381 m.p.h.; air volume 196 cubic feet per minute; water lift 48". Equipped with 20 ft. 3-wire power cord and plug.

| | |
|--|-----------------------|
| | Catalog Number |
| Model H Blower, 115 V., 60 Hz. | .BLWRHA |
| Model H Blower, 230 V., 50/60 Hz. | .BLWRHB |
| Net Weight 15 lbs. 8 ozs., Shipping Weight 17 lbs. | |

Model G General-Duty Blower



Model G is 1-4/10 h.p.; air speed 389 m.p.h.; air volume 155 cubic feet per minute; water lift 40". Equipped with 20 ft. 3-wire power cord and plug.

| | |
|--|-----------------------|
| | Catalog Number |
| Model G Blower, 115 V., 60 Hz. | .BLWRGA |
| Net Weight 12 lbs. 8 ozs., Shipping Weight 14 lbs. | |





**Model F
Medium-Duty Blower**

Model F is 2/3 h.p.; air speed 307 m.p.h.; air volume 109 cubic feet per minute; water lift 25". Equipped with 20 ft. 3-wire power cord and plug.

| | |
|---|-----------------------|
| | Catalog Number |
| Model F Blower, 115 V., 60 Hz. | .BLWRFA |
| Model F Blower, 230 V., 50/60 Hz. | .BLWRFB |
| Net Weight 9 lbs. 8 ozs., Shipping Weight 11 lbs. | |

**Model L
"Hot & Cold" Blower**

Model L is 1/3 h.p.; air speed 227 m.p.h.; air volume 64 cubic feet per minute; water lift 16". Equipped with 20 ft. 3-wire power cord and plug.

In addition to use as a conventional blower, Model L is used as an electric torch, providing an air stream heated to 160°F. for a variety of industrial uses including drying of electrical insulation, switchboards, electronic equipment, and other delicate items. Intensity of air speed and temperature can be varied by moving the blower nearer to or farther from the work. Model L *cannot be used as a vacuum cleaner.*



| | |
|--|-----------------------|
| | Catalog Number |
| Model L Blower, 115 V., 60 Hz. | .BLWRLA |
| Model L Blower, 230 V., 50/60 Hz. | .BLWRLB |
| Net Weight 10 lbs. 8 ozs., Shipping Weight 12 lbs. | |

**Suction Attachment Set C
for Blower Models H, G & F**



The suction attachments pictured at the left convert models H, G, & F from blowers to hand-held or shoulder carried portable vacuum cleaners. All attachments are 1-1/2" diameter; included are: 4' hose with swivel connector, 6" nozzle with clip-on brush, 11" flat fibre nozzle, dust bag, and shoulder belt. Replacement attachments can be bought separately.

| | |
|---|-----------------------|
| | Catalog Number |
| Suction Attachment Set C | .BLWRC |
| Net Weight 3 lbs., Shipping Weight 4 lbs. | |