


TYPE MSL — METAL SLITTING SAWS

**Used for deep-slotting of Steel and Cast Iron — also cast Brass and Aluminum and similar hard non-ferrous metals.
Has a stronger tooth and gives a better finish with less bur.**

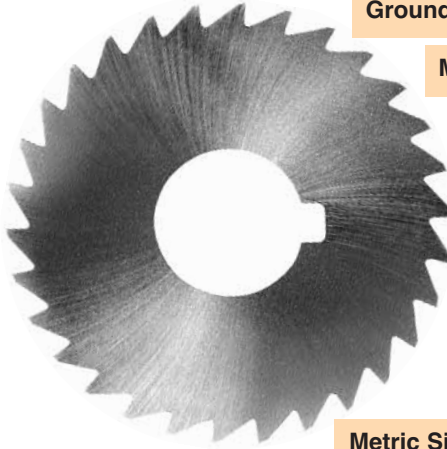

Ground Teeth

M-2 High Speed Steel

Hollow Ground For Side Clearance

Ground Land

NOTE:

Saws in schedule are stocked for immediate shipment. Intermediate thicknesses, use next higher price in schedule (plus a slight grinding charge for smaller quantities).

We'll gladly quote on other sizes, rake angles, tooth styles, hole sizes — just send us your print or sample saw.

Teeth can be alternately beveled if chips tend to stick in slot.

Rake Angle of Teeth: 0°

Metric Sizes Available

Thickness		O.D.	2-1/2"	3"	4"	5"	6"
		Hole	7/8"	1"	1"	1"	1"
Fraction	Decimal	No. of Teeth	28	30	36	44	50
3/16"	.1875"			OMSLD1562	OMSLE1875	OMSLF1875	OMSLG1875
5/32"	.1562"			OMSLD1250	OMSLE1250	OMSLF1250	OMSLG1250
1/8"	.1250"		OMSLH1250	OMSLD1250	OMSLE1250	OMSLF1250	OMSLG1250
3/32"	.0937"		OMSLH0937	OMSLD0937	OMSLE0937	OMSLF0937	OMSLG0937
1/16"	.0625"		OMSLH0625	OMSLD0625	OMSLE0625	OMSLF0625	OMSLG0625
3/64"	.0468"		OMSLH0468	OMSLD0468	OMSLE0468	OMSLF0468	OMSLG0468
1/32"	.0312"		OMSLH0312	OMSLD0312	OMSLE0312		

Tolerances: O.D. ±.005; Thickness ±.0005; I.D. +.001 -.000
Closer tolerances available at additional cost.

RESHARPENING SERVICE

*Complete sharpening service is available.
Prices on application.*

COATING SERVICE

*TiN, TiCN and other surface coatings are available.
Prices on application.*

HIGH-SPEED STEEL JEWELERS SLOTTING SAWS


Ground Teeth

Hollow Ground For Side Clearance

M-2 High Speed Steel

Rake Angle of Teeth: 0°

Metric Sizes Available



Tolerances: O.D. ±.005; Thickness ±.001; I.D. +.001 -.000

Closer tolerances available at additional cost.

(Keyways provided on 1/2" & 1" I.D. saws, of .020" thickness and up.)

STOCK SAWS

Thickness		O.D.	1-3/4"	2"	2-1/2"	3"	4"
		Hole	1/2"	1/2"	1/2"	*1/2", 1"	*1/2", 1"
B&S Gage No. and Fraction	Decimal	No. of Teeth	132, 160	110, 152	140, 190	170, 224	224, 300
15	.057"		OJA057	OJJ057	OJH057	OJD057	OJE057
16	.051"		OJA051	OJJ051	OJH051	OJD051	OJE051
3/64"	.047"		OJA047	OJJ047	OJH047	OJD047	OJE047
17	.045"		OJA045	OJJ045	OJH045	OJD045	OJE045
18	.040"		OJA040	OJJ040	OJH040	OJD040	OJE040
19	.036"		OJA036	OJJ036	OJH036	OJD036	OJE036
20	.032"		OJA032	OJJ032	OJH032	OJD032	OJE032
21	.028"		OJA028	OJJ028	OJH028	OJD028	OJE028
22	.025"		OJA025	OJJ025	OJH025	OJD025	OJE025
23	.023"		OJA023	OJJ023	OJH023	OJD023	OJE023
24	.020"		OJA020	OJJ020	OJH020	OJD020	OJE020
25	.018"		OJA018	OJJ018	OJH018	OJD018	OJE018
26	.016"		OJA016	OJJ016	OJH016	OJD016	OJE016
27	.014"		OJA014	OJJ014	OJH014	OJD014	OJE014
28	.012"		OJA012	OJJ012	OJH012	OJD012	OJE012
30	.010"		OJA010	OJJ010	OJH010	OJD010	OJE010
32	.008"		OJA008	OJJ008	OJH008	—	—

(ADD NO. OF TEETH TO CATALOG NUMBER WHEN ORDERING)

* (3" & 4" O.D.'s WITH 1/2" HOLES, ADD "H" AFTER THE PART NO.)



MARTINDALE • PO Box 430 • Cleveland, OH 44107

Phone (216) 521-8567 • Fax Local 521-9476 / USA & Canada (800) 344-9191

E-Mail: sales@martindaleco.com

Web Site: www.martindaleco.com