


CARBIDE METAL-WORKING SAWS

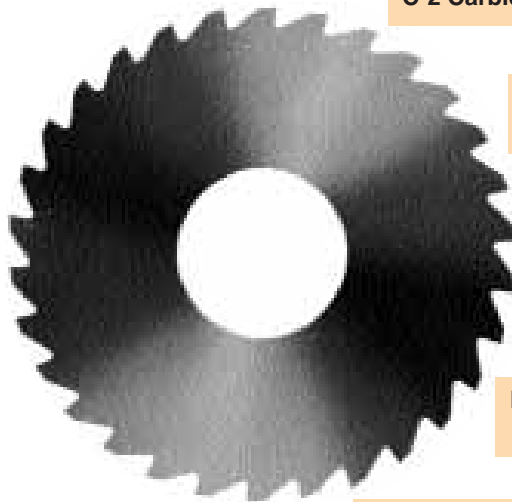

C-2 Carbide

Hollow Ground For Side Clearance

Rake Angle of Teeth: 5° Positive

Metric Sizes Available

Carbide metal-working saw blades have steadily gained in popularity for many applications. Carbide, harder and more wear resistant than High-Speed Steel, provides longer tool life and decreased cycle times. Slotting, Slitting, Cut-Off and many other uses benefit from the use of solid carbide saw blades. A rigid set up with proper speed and feed, using correct coolant and tooth geometry for the application, will ensure optimum performance of your solid carbide saws. Contact our sales department to discuss the correct circular saw blade for your specific application.

SPECIALS: An almost endless number of variations from the tooth types and specifications shown below can be furnished to suit your exact needs and at comparable prices. Let us know your particular Carbide Metal-Working Saw Blade requirements so we can quote price and delivery.

Specify thickness and number of teeth when ordering.

Tolerances: O.D. ±.005; Thickness ±.0005; I.D. +.001 -.000
Closer tolerances available at additional cost.

	O.D.	1-1/2"	1-3/4"	1-3/4"	2"	2"	2-1/4"	2-1/4"	2-1/2"	2-3/4"	3"	4"	5"	6"
	HOLE	1/2"	1/2"	7/8"	1/2"	1"	5/8"	1"	1"	1"	1"	1"	1"	1"
Thickness Range	No. of Teeth	36	38	38	40	40	44	44	48	60	72	80	100	120
.010" - .019"		X11	X1A	X1AA	X1J	X1JJ	X1B	X1BB	X1H	X1C	X1D	—	—	—
.020" - .030"		X2I	X2A	X2AA	X2J	X2JJ	X2B	X2BB	X2H	X2C	X2D	X2E	—	—
.031" - .050"		X3I	X3A	X3AA	X3J	X3JJ	X3B	X3BB	X3H	X3C	X3D	X3E	X3F	X3G
.051" - .070"		X4I	X4A	X4AA	X4J	X4JJ	X4B	X4BB	X4H	X4C	X4D	X4E	X4F	X4G
.071" - .090"		X5I	X5A	X5AA	X5J	X5JJ	X5B	X5BB	X5H	X5C	X5D	X5E	X5F	X5G
.091" - .110"		X6I	X6A	X6AA	X6J	X6JJ	X6B	X6BB	X6H	X6C	X6D	X6E	X6F	X6G
.111" - .130"		X7I	X7A	X7AA	X7J	X7JJ	X7B	X7BB	X7H	X7C	X7D	X7E	X7F	X7G
.131" - .150"		X8I	X8A	X8AA	X8J	X8JJ	X8B	X8BB	X8H	X8C	X8D	X8E	X8F	X8G
.151" - .170"		X9I	X9A	X9AA	X9J	X9JJ	X9B	X9BB	X9H	X9C	X9D	X9E	X9F	X9G
.171" - .190"		X10I	X10A	X10AA	X10J	X10JJ	X10B	X10BB	X10H	X10C	X10D	X10E	X10F	X10G
.191" - .210"		X11I	X11A	X11AA	X11J	X11JJ	X11B	X11BB	X11H	X11C	X11D	X11E	X11F	X11G
.211" - .230"		X12I	X12A	X12AA	X12J	X12JJ	X12B	X12BB	X12H	X12C	X12D	X12E	X12F	X12G
.231" - .250"		X13I	X13A	X13AA	X13J	X13JJ	X13B	X13BB	X13H	X13C	X13D	X13E	X13F	X13G

Teeth shown for general use. A wide range of teeth available.

Keyways are optional at extra cost.

Speed should be approximately 50% greater than HSS.

Specify thickness and number of teeth when ordering.

RESHARPENING SERVICE

Complete resharpening service is available. Prices on application.

COATING SERVICE

TiN, TiCN and other surface coatings are available. Prices on application.



MARTINDALE • PO Box 430 • Cleveland, OH 44107
Phone (216) 521-8567 • Fax Local 521-9476 / USA & Canada (800) 344-9191
E-Mail: sales@martindaleco.com
Web Site: www.martindaleco.com